



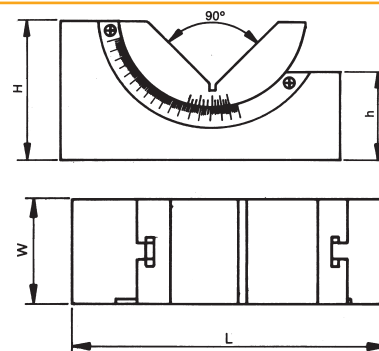

Angle Plate

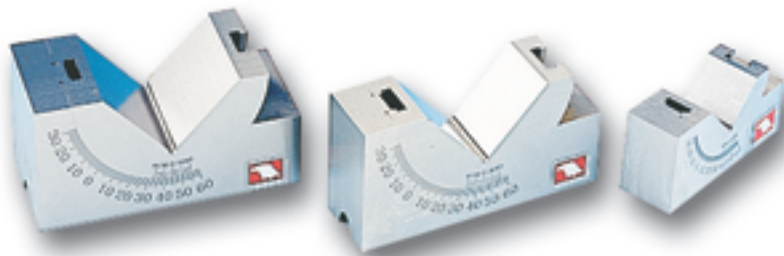

Unit: mm

IT CAN BE LOCKED AT DESIRED ANGLE FROM THE BOTTOM.

1. USING ON THE MILLING MACHINE.

2. USING ON THE GRINDING MACHINE.

3. TO MARK OUT ON A WORKPIECE.

4. USING ON THE DRILLING MACHINE.



5. TO PROCESS WITH AN END MILL.

| ORDER NO. | H | W | L | h | N.W. | CODE NO. |
|-----------|----|----|-----|----|-------|----------|
| VAP-1 | 47 | 46 | 102 | 28 | 1.5KG | 2005-001 |
| VAP-2 | 47 | 30 | 102 | 28 | 1KG | 2005-002 |
| VAP-3 | 32 | 25 | 75 | 22 | 0.5KG | 2005-003 |

90° V-way. High carbon steel hardened to 50°-54° HRC, precision ground to within 0.005mm accuracy in squareness. Angle tolerance 30 seconds. Sets any angle 0-60°, vernier reading 10 minutes. 2 set screws provided for firmlocking at fixed angle.
 Material: SK2
 Hardness: HRC50°-54°
 Squareness: ±0.005mm
 Tolerance of angle: ±10"
 Angular measures from 0°-60°



Micro-Adjustable Angle Plate

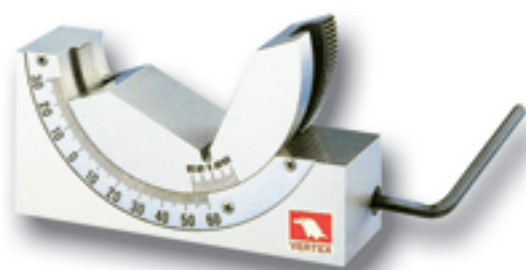


ANGULAR CAN BE ADJUSTED FROM 0°~60° BY SCREW

Unit: mm

| ORDER NO. | H | W | L | h | N.W. | CODE NO. |
|-----------|----|----|-----|----|-------|----------|
| VAPM-1 | 47 | 46 | 102 | 28 | 1.5KG | 2005-010 |
| VAPM-2 | 47 | 30 | 102 | 28 | 1KG | 2005-011 |
| VAPM-3 | 32 | 25 | 75 | 22 | 0.5KG | 2005-012 |



Precision V Block PAIRS

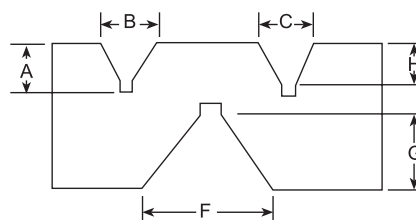

Unit: mm

| ORDER NO. | A | B | C | F | G | H | L x W x H | WEIGHT | CODE NO. |
|-----------|----|----|----|----|----|----|-----------|--------|----------|
| V-3VA | 9 | 23 | 19 | 44 | 21 | 7 | 76X23X43 | 0.8 | 2005-015 |
| V-4VA | 14 | 34 | 28 | 62 | 27 | 11 | 100X32X60 | 2.5 | 2005-016 |
| V-5VA | 14 | 35 | 40 | 63 | 29 | 19 | 124X35X61 | 5 | 2005-017 |