




Indexable Twin-bit Rough Boring Head RBH-LA

Boring range from $\varnothing 25\text{mm}$ to $\varnothing 810\text{mm}$;

a variety of tool holders and boring heads are for your selection.




ORDER NO.	Tool Connection	D(mm) Boring Range	L (mm)	C (mm)	Insert	(kg) Weight	CODE NO.
RBH25-35LA-C	VBK2	25~35	50	24	CCMT060204	0.15	3220-340
RBH32-45LA-C	VBK3	32~45	60	31	CCMT060204	0.3	3220-341
RBH32-45LA-T					TCMT110204		3220-342
RBH40-55LA-C	VBK4	40~55	74	39	CCMT09T304	0.6	3220-343
RBH40-55LA-T					TCMT16T304		3220-344
RBH40-55LA-S					SCMT09T304		3220-345
RBH52-75LA-C	VBK5	52~75	80	50	CCMT09T304	1	3220-346
RBH52-75LA-T					TCMT16T304		3220-347
RBH52-75LA-S					SCMT09T304		3220-348
RBH68-100LA-C	VBK6	68~100	90	66	CCMT120408	2.5	3220-349
RBH68-100LA-T					TCMT16T304		3220-350
RBH68-100LA-S					SCMT120404		3220-351
RBH90-130LA-C	VBK6	90~130	100	88	CCMT120408	3.1	3220-352
RBH90-130LA-T					TCMT16T304		3220-353
RBH90-130LA-S					SCMT120404		3220-354
RBH120-164LA-C	BST	120~164	95	95	CCMT120408	3.8	3220-355
RBH120-164LA-T					TCMT220408		3220-356
RBH120-164LA-S					SCMT120404		3220-357
RBH160-204LA-C	BST	160~204	130	130	CCMT120408	4.8	3220-358
RBH160-204LA-T					TCMT220408		3220-359
RBH160-204LA-S					SCMT120404		3220-360
RBH200-310LA	BST Series	200~310	130	180	Optional Inserts CCMT120408 TCMT16T304 TCMT220408 SCMT120404	9.7	3220-361
RBH300-410LA		300~410		280		11.7	3220-362
RBH400-510LA		400~510		380		13.7	3220-363
RBH500-610LA		500~610		480		15.7	3220-364
RBH600-710LA		600~710		580		17.7	3220-365
RBH700-810LA		700~810		680		19.7	3220-366



FBH Finish Boring Head

Boring diameter from $\varnothing 20$ - $\varnothing 810\text{mm}$

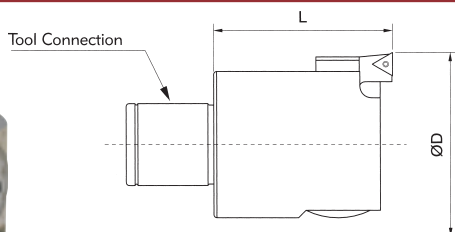

Ordering Example

FBH 52-75 — VBK5
Head Type Boring Diameter Tool Connection

FEATURES:

1. FBH finish boring head is suitable for finish boring with working ranges from $\varnothing 20\text{mm}$ to $\varnothing 810\text{mm}$ on diameter.
2. The dial has been graduated into 50 divisions, each of which is 0.01mm on diameter. Available is a sub-dial for finer adjustment.
3. High precision internal lead screw with inner lubrication is free from the effects of chip, featuring high durability.
4. Coolant nozzle easily cools the insert elongating its working life.
5. Cartridge unit is housed in a square structure with two face support, proving high stability and rigidity.

ORDER NO. Boring Head Type	Tool Connection	ØD Diameter	length	Weight	Insert/Clamping Ssrew	CODE NO.
FBH20	VBK1	20-26	35	0.1	TP08/M2.2;TP06/M2	3220-370
FBH25	VBK2	25-33	40	0.2		3220-371
FBH32	VBK3	32-42		0.3		3220-372
FBH40	VBK4	40-55	50	0.5		3220-373
FBH52	VBK5	52-75	60	1	TP08/M2.2;TP09/M2.5	3220-374
FBH68	VBK6	68-102	72	2		3220-375
FBH100	VBK6	100-152		2.9		3220-376
FBH150	VBK6	150-202		4.2		3220-377
FBH200	BST Series	200-310	120	9.7		3220-378
FBH300		300-410		11.7		3220-379
FBH400		400-510		13.7		3220-380
FBH500		500-610		15.7		3220-381
FBH600		600-710		17.7		3220-382
FBH700		700-810		19.7		3220-383